


同軸固定減衰器

Coaxial Fixed Attenuators

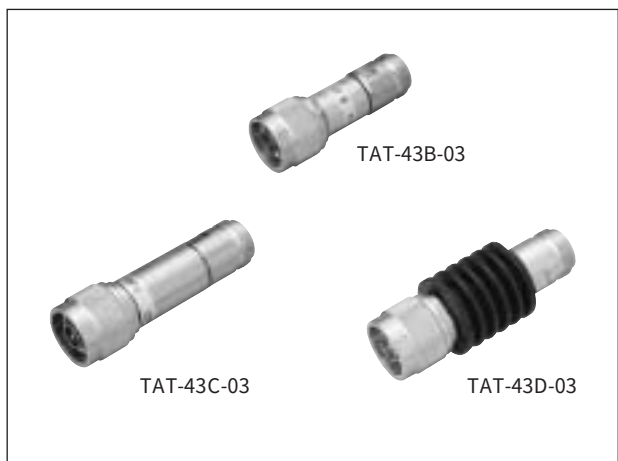

■ N(P)・N(J)TYPE

■ 使用環境 : OPERATIONAL ENVIRONMENT

温度(Temperature) : -10℃~+60℃

湿度(Humidity) : 0~90%


■ 材質・処理 : MATERIAL/FINISH

名 称 Part name	材 質 Material	処 理 Finish
Body	Brass	Nickel plated
Contact(Male)	Beryllium copper	Gold plated
Contact(Female)	Beryllium copper	Gold plated
Insulator	PTFE	
Radiator	Aluminum	Black Aluminte

■仕様 : SPECIFICATIONS


Model No.	Attenuation	Deviation(dB)			Impedance (Ω)	V.S.W.R.(Max)			Power (W Max) at 25°C	Fig																									
	Nominal (dB)	DC~4GHz	4~8GHz	8~11GHz		DC~4GHz	4~8GHz	8~11GHz																											
TAT-43B-01	1	±0.5		±1.0	50	1.2			1	①																									
TAT-43B-02	2																																		
TAT-43B-03	3																																		
TAT-43B-04	4																																		
TAT-43B-05	5																																		
TAT-43B-06	6																																		
TAT-43B-07	7			±1.5								1.25	1.3																						
TAT-43B-08	8																																		
TAT-43B-09	9																																		
TAT-43B-10	10																																		
TAT-43B-11	11																																		
TAT-43B-12	12																																		
TAT-43B-15	15							1.2																											
TAT-43B-20	20																																		
TAT-43C-03	3																																		
TAT-43C-06	6																																		
TAT-43C-10	10	±0.5																			2	②													
TAT-43C-20	20																																		
TAT-43C-30	30	±1.0																																	
TAT-43D-03	3																																		
TAT-43D-06	6	±0.5																																	
TAT-43D-10	10																																		
TAT-43D-20	20	±1.0																																	
TAT-43D-30	30																																		

■寸法 : SIZE

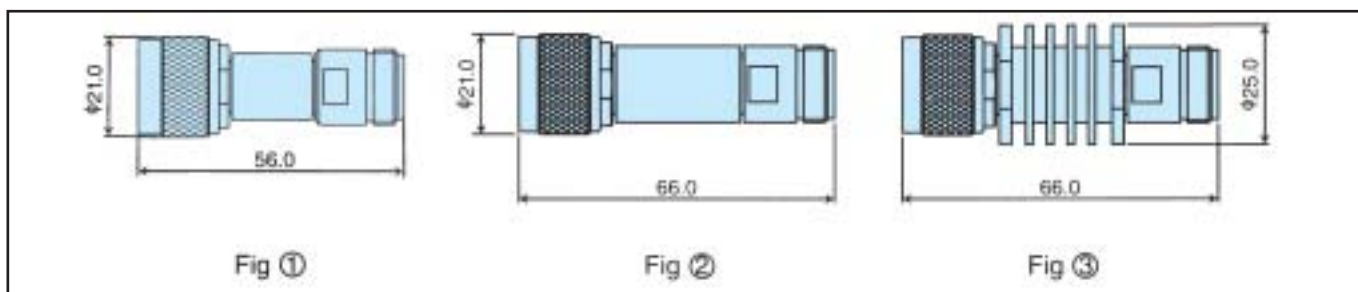

同軸固定減衰器

Coaxial Fixed Attenuators

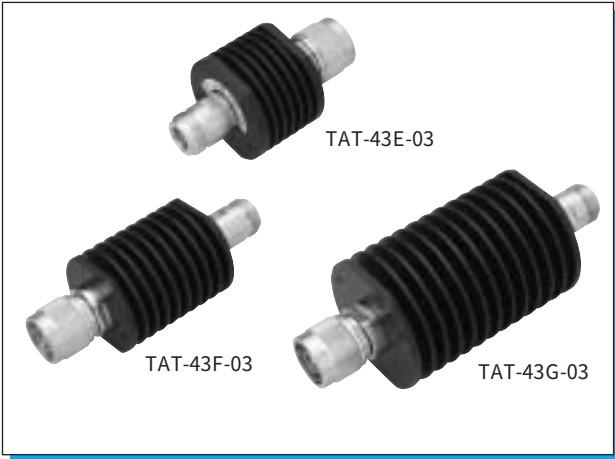

■ N(P)・N(J)TYPE

■ 使用環境 : OPERATIONAL ENVIRONMENT

温度(Temperature) : -10°C~+60°C

湿度(Humidity) : 0~90%

■ 材質・処理 : MATERIAL / FINISH

名 称 Part name	材 質 Material	処 理 Finish
Body	Brass	Nickel plated
Contact(Male)	Beryllium copper	Gold plated
Contact(Female)	Beryllium copper	Gold plated
Insulator	PTFE	
Radiator	Aluminum	Black Aluminte

■ 仕様 : SPECIFICATIONS

Model No.	Attenuation		Frequency Range (GHz)	Impedance (Ω)	V.S.W.R. (Max)	Power (W Max) at 25°C	Fig		
	Nominal (dB)	Deviation (dB)							
TAT-43E-03	3	±0.5	DC~4	50	1.2	10	④		
TAT-43E-06	6								
TAT-43E-10	10	±1.0							
TAT-43E-20	20								
TAT-43E-30	30								
TAT-43F-03	3	±0.5				20	⑤		
TAT-43F-06	6								
TAT-43F-10	10	±1.0							
TAT-43F-20	20								
TAT-43F-30	30								
TAT-43G-03	3	±0.5						30	⑥
TAT-43G-06	6								
TAT-43G-10	10	±1.0							
TAT-43G-20	20								
TAT-43G-30	30								

■ 寸法 : SIZE

